

N2 W4 A 1,1_m

AS-MAB.A

CE



asebal

Vehicle Restraint System

Definition


Steel and wood combined system for lateral side, formed by a metal barrier with spacer and C posts 2 metres apart. The barrier and posts are covered in wood.

Note: Only available for the Chilean and Peruvian market.

Performance parameters

Containment level	N2	Working width (W)	W4	Impact Severity	A	Dynamic Deflection (D)	1,1 _m
-------------------	----	-------------------	----	-----------------	---	------------------------	------------------

Profile

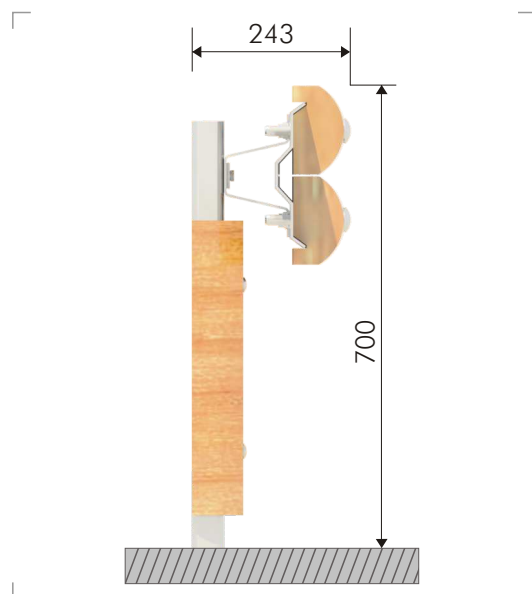




asebal

Vehicle Restraint System

Components for sections of 2 m

Item	Part	Uds
1	Crossbeam 2,200 mm in 4mm for wooden barrier	1
2	C-Post of 1,500x5 for wood with 3 punched holes	1
3	Spacer for wooden barrier	1
4	Bolt DIN 603 M14x120	10
5	Bolt DIN 603 M10x50	2
6	Hexagon head cap bolt DIN 933 M 10x40	1
7	Nut DIN 934 M14	20
8	Nut DIN 934 M 10, quality 5	3
9	Washer DIN 125 M14	20
10	Washer DIN 125 M10	2
11	Washer Ø11 40x40x5 mm for 10 M	2
12	Wooden front protector for post 460x155x80	1
13	Wooden crossbeam 138x78, 1,990 mm long	2

Fasteners

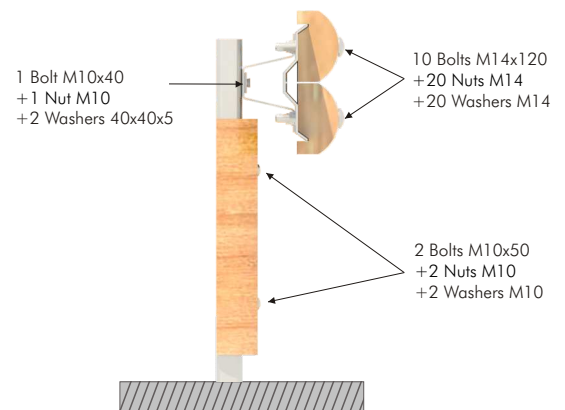

Detail of joint between barriers